

# MOEN® 摩恩

## Specifications

### DESCRIPTION

- Chrome/BL finish
- G 1/2 connections
- Thermostatic valve design and with digital display window

### OPERATION

- Rotate style handle
- Safety stop preset temperature at 38°C
- Factory established temperature range from 20°C to 49°C

### FLOW

- Water flow rate at 0.1Mpa is 6.0L/min minimum in tub spout, about 4.0 L/min to 9.0 L/min with hose and handheld shower.

### CARTRIDGE


- Thermostatic cartridge design with Nonmetallic/no-ferrous material

### STANDARDS

- Designed to meet QB/T 2806

### WARRANTY

- 5 years limited warranty against leaks and dirps.

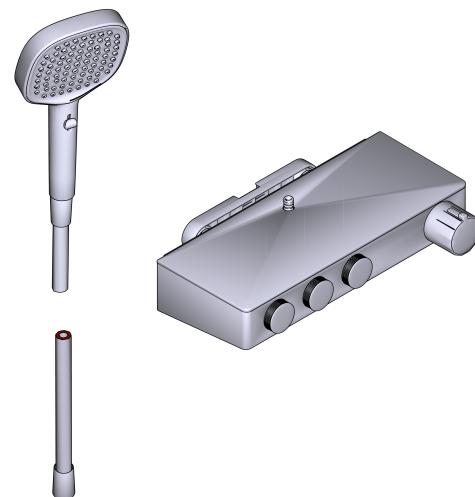


### Cynthia

Thermostatic Tub Shower Faucet, Flow Control

MODELS : 66341

Units: mm

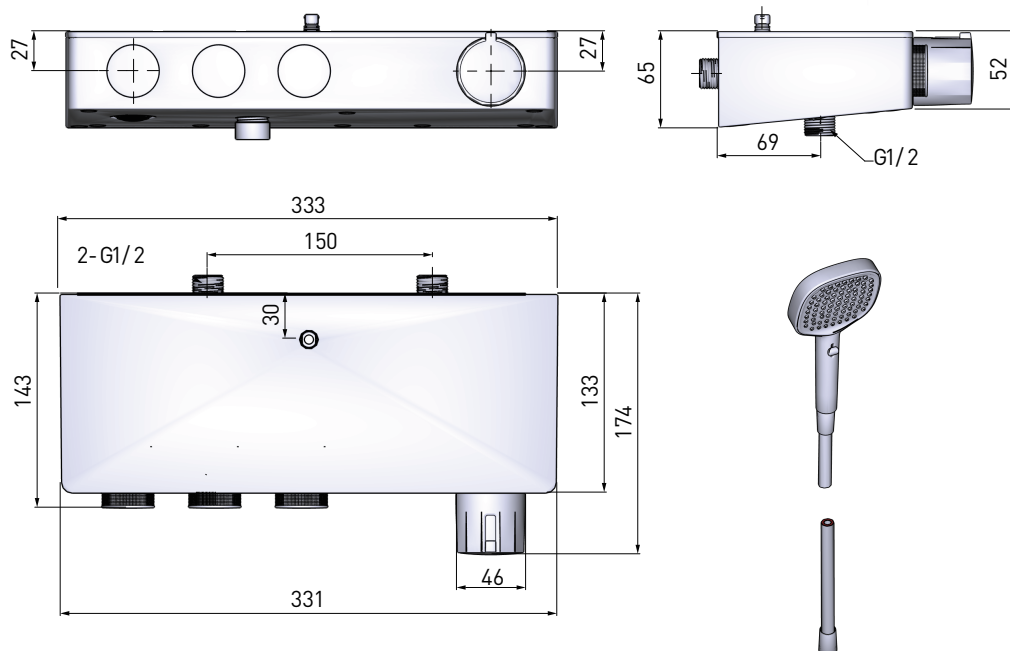

CRITICAL DIMENSIONS DO NOT SCALE