MOEN®恩

Specifications

DESCRIPTION

- 1-Function Overhead Shower
- SUS 304 shell
- Brass ball joint and nut in chrome
- Nozzles in gray 6U
- G1/2 connector


- Flow rate is about 9.11L/min at 0.3MpaFlow rate is about 7.79L/min at 0.1Mpa

STANDARD


- Designed to meet GB/T 23447-2009
- Plating passed ASS 24hrs grade-10


WARRANTY

• 1 year limited warranty against leaks and drips



1-Function Overheld Shower MODELS: M22061

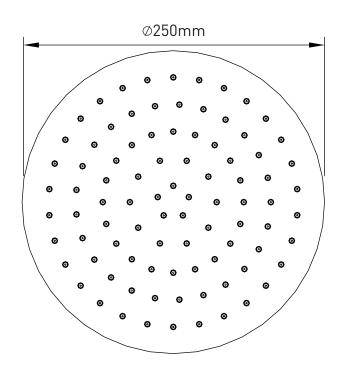

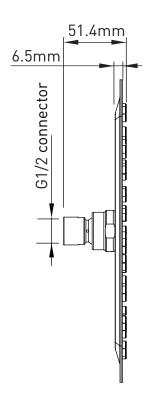

CRITICAL DIMENSIONS DO NOT SCALE

www.moen.cn ©2022 Moen Incorporated