# MOEN®摩恩

# **Specifications**

## **DESCRIPTION**

- 1-Function Overhead Shower
- SUS 304 shell
- Brass ball joint and nut in chrome
- Nozzles in gray 6U
- G1/2 connector

#### FI OW


- Flow rate is about 11.19L/min at 0.3Mpa
- Flow rate is about 6.88L/min at 0.1Mpa

# **STANDARD**


- Designed to meet GB/T 23447-2009
- Plating passed ASS 24hrs grade-10


### WARRANTY

• 1 year limited warranty against leaks and drips



1-Function Overheld Shower <u>MODELS</u>: M22066

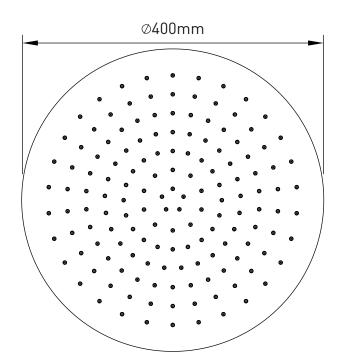

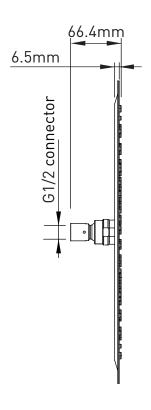

CRITICAL DIMENSIONS DO NOT SCALE

©2022 Moen Incorporated www.moen.cn