

# MOEN® 摩恩

## Specifications

### DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 connections
- Includes 400mm long inlet hoses, except GN10122MCL01 with 600mm inlet hoses
- Including plastic POP-UP waste.

### OPERATION

- Lever Style handle
- Pull-on/ Push-off
- Temperature controlled through 90 degree arc of handle travel

### FLOW

- Flowrate is about 3.0L/min to 4.5L/min at 0.1Mpa

### CARTRIDGE


- Ceramic 35mm cartridge design
- Ceramic material

### STANDARDS

- Desigend to meet GB 18145, GB 25501 (Grade 1)

### WARRANTY





- 5 years limited warranty against leaks and drips

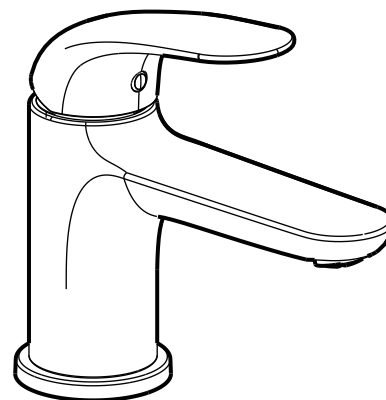

## WALES

Single Mount Single-Handle Lavatory Facuet

MODELS : GN10122 Series

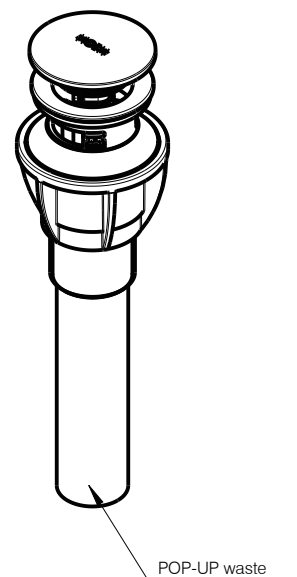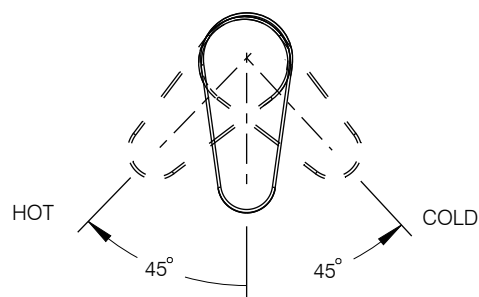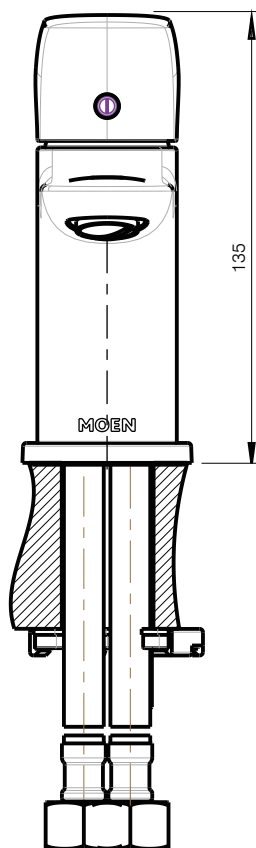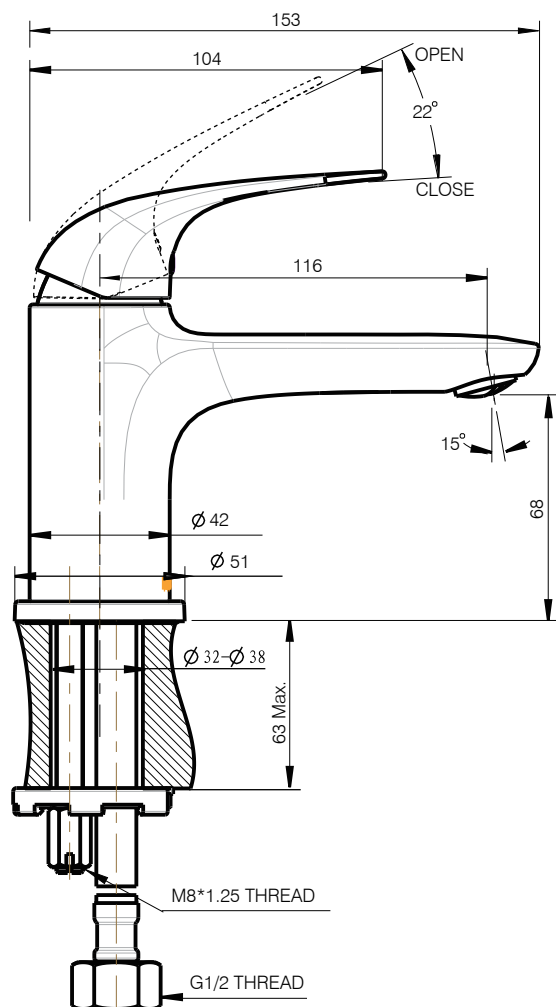

CRITICAL DIMENSIONS DO NOT SCALE

Unite: mm