

# MOEN® 摩恩

## Specifications

### DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 inlet connections
- Includes 400mm long flexible inlet hoses
- Pullout spray with 1350mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout provides ability to install handle on either side

### OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pullout or retracted position

### FLOW

- Water flowrate about 3.0 L/min to 4.5 L/min at 0.1Mpa
- Water flow difference is limited to 3.0 L/min maximum from 0.1 Mpa to 0.3 Mpa

### CARTRIDGE


- MOEN Duralast cartridge

### STANDARD

- Designed to meet GB 18145; GB 25501

### WARRANTY

- 5 years limited warranty against leaks and drips




### KERRY

#### Single Handle Pullout Lavatory Faucet

Models: GN89124 Series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. To 38mm Max.DIA.HOLE

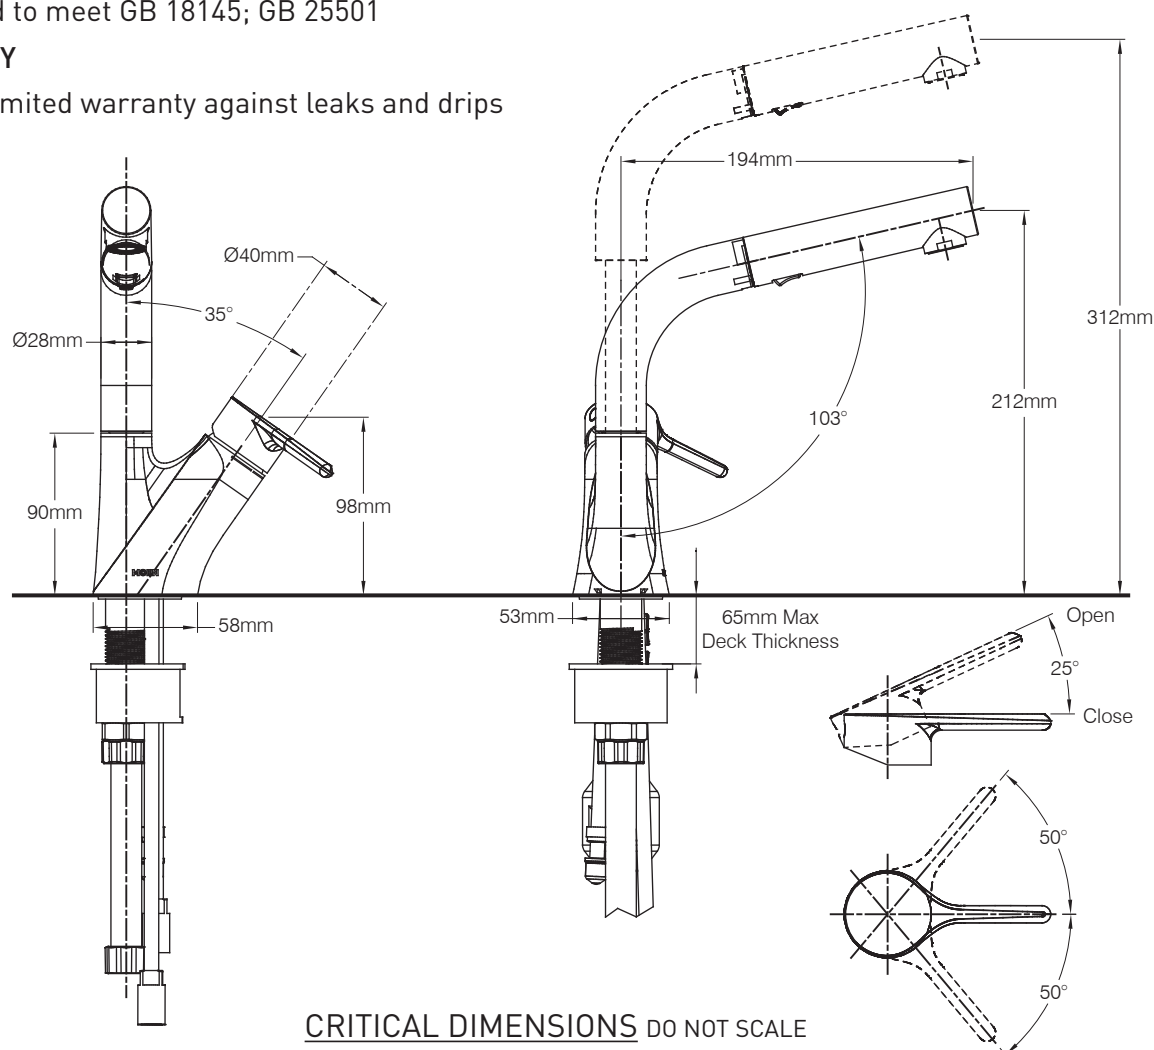

CRITICAL DIMENSIONS DO NOT SCALE